


## 7200

Solid carbide end-mill, center cutting, for processing soft metals, high-end surface finish.

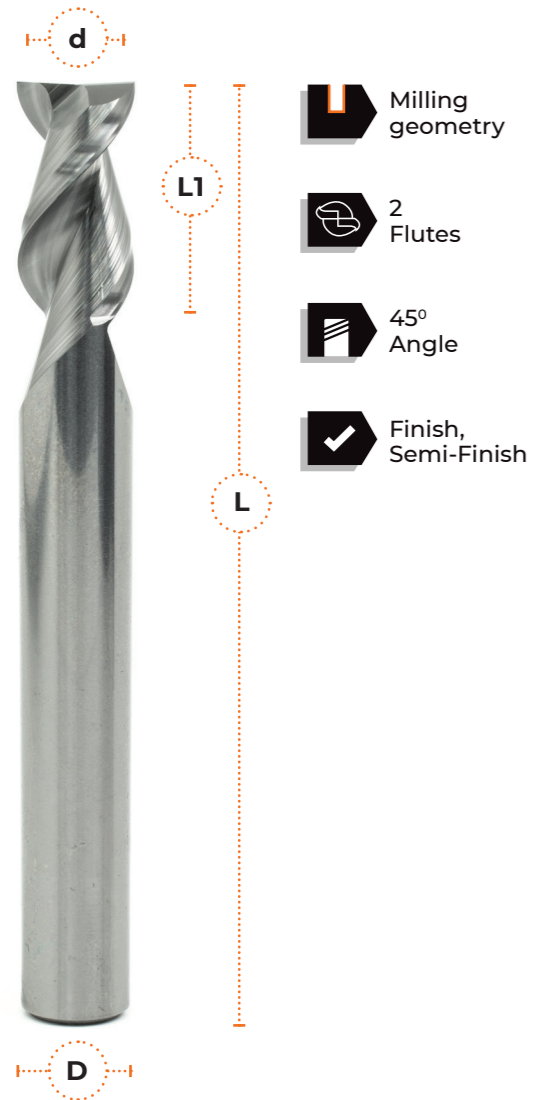

 Standard Length

øD	ød	L1	L	Serial
1.0	1.0	6	50	7201006050
1.0	3.0	3	50	7201003050
1.0	3.0	6	50	7201006050
1.5	3.0	6	50	7201503050
1.5	3.0	10	50	7201510050
1.5	6.0	6	57	7201506057
1.5	6.0	10	57	7201510057
1.5	1.5	6	50	7201506050
2.0	2.0	6	50	7202006050
2.0	2.0	10	50	7202010050
2.0	3.0	6	50	7203006050
2.0	3.0	10	50	7202010050
2.0	3.0	12	50	7202012050
2.0	6.0	6	57	7202006057
2.0	6.0	10	57	7202010057
2.5	2.5	6	50	7202506050
2.5	3.0	6	50	7202506050
2.5	3.0	10	50	7202510050
2.5	3.0	12	50	7202512050
2.5	6.0	6	57	7202506057
2.5	6.0	10	57	7202510057
3.0	6.0	6	57	7203006057
3.0	6.0	10	57	7203010057
3.0	6.0	12	57	7203012057
3.0	3.0	12	50	7203012050
3.0	3.0	10	63	7203010063
3.0	3.0	12	75	7203012075
3.0	3.0	20	75	7203020075
3.0	3.0	30	75	7203030075
3.0	3.0	14	100	7203014100
3.5	3.5	10	50	7203510050
3.5	6.0	8	57	7203508057
3.5	6.0	12	57	7203512057
4.0	6.0	8	57	7204008057
4.0	6.0	14	57	7204014057
4.0	4.0	12	50	7204012050
4.0	4.0	14	63	7204014063
4.0	4.0	20	75	7204020075
4.0	4.0	30	75	7204030075

כרסומי גמר פינה חדה ללא ציפוי, מצח חודר מרכז, לעיבוד חומרים רכים בטיבי שטח גבוהים.

- אורכים לפי דרישה
- שחרור קנה לפי דרישה

øD	ød	L1	L	Serial
4.0	4.0	14	100	7204014100
4.0	4.0	30	100	7204030100
4.5	6.0	10	57	7204510057
5.0	5.0	14	57	7205014057
5.0	6.0	14	57	7205014057
5.0	5.0	16	75	7205016075
5.0	5.0	16	100	7205016100
5.0	5.0	30	100	7205030100
5.0	5.0	16	125	7205016125
6.0	6.0	16	57	7206016057
6.0	6.0	16	63	7206016063
6.0	6.0	22	63	7206022063
6.0	6.0	22	75	7206022075
6.0	6.0	30	75	7206030075
6.0	6.0	20	100	7206020100
6.0	6.0	30	100	7206030100
6.0	6.0	40	100	7206040100
6.0	6.0	20	125	7206020125
6.0	6.0	20	160	7206020160
7.0	7.0	20	63	7207020063
7.0	7.0	30	100	7207030100
7.0	7.0	30	125	7207030125
7.0	7.0	30	160	7207030160
8.0	8.0	22	63	7208022063
8.0	8.0	30	75	7208030075
8.0	8.0	22	100	7208022100
8.0	8.0	30	100	7208030100
8.0	8.0	40	100	7208040100
8.0	8.0	50	100	7208050100
8.0	8.0	22	125	7208022125
8.0	8.0	60	125	7208060125
8.0	8.0	30	160	7208030160
8.0	8.0	30	200	7208030200
9.0	9.0	22	75	7209022075
9.0	9.0	30	100	7209030100
9.0	9.0	30	125	7209030125
10.0	10.0	24	75	7210024075
10.0	10.0	30	75	7210030075
10.0	10.0	30	100	7210030100
10.0	10.0	40	100	7210040100
10.0	10.0	50	100	7210050100
10.0	10.0	30	125	7210030125
10.0	10.0	60	125	7210060125
10.0	10.0	30	160	7210030160
10.0	10.0	30	200	7210030200
12.0	12.0	30	83	7212030083

øD	ød	L1	L	Serial
12.0	12.0	30	100	7212030100
12.0	12.0	40	100	7212040100
12.0	12.0	50	100	7212050100
12.0	12.0	30	125	7212030125
12.0	12.0	60	125	7212060125
12.0	12.0	30	160	7212030160
12.0	12.0	60	160	7212060160
12.0	12.0	30	200	7212030200
14.0	14.0	32	88	7214032088
14.0	14.0	40	100	7214040100
14.0	14.0	40	125	7214040125
14.0	14.0	60	125	7214060125
14.0	14.0	40	160	7214040160
14.0	14.0	40	200	7214040200
16.0	16.0	32	92	7216032092
16.0	16.0	42	100	7216042100
16.0	16.0	42	125	7216042125
16.0	16.0	65	125	7216065125
16.0	16.0	42	160	7216042160
16.0	16.0	60	160	7216060160
16.0	16.0	85	160	7216085160
16.0	16.0	38	180	7216038160
16.0	16.0	38	200	7216038200
16.0	16.0	38	230	7216038230
16.0	16.0	38	250	7216038250
16.0	16.0	38	330	7216038330
18.0	18.0	42	100	7218042100
18.0	18.0	42	125	7218042125
18.0	18.0	42	160	7218042160
18.0	18.0	42	200	7218042100
20.0	20.0	42	110	7220042110
20.0	20.0	42	125	7220042125
20.0	20.0	65	125	7220065125
20.0	20.0	42	160	7220042160
20.0	20.0	85	160	7220085160
20.0	20.0	42	180	7220042180
20.0	20.0	50	200	7220050200
20.0	20.0	50	250	7220050250
22.0	22.0	44	125	7222044125
22.0	22.0	44	160	7222044160
22.0	22.0	44	200	7222044200
25.0	25.0	50	125	7225050125
25.0	25.0	50	160	7225050160
25.0	25.0	50	200	7225050200
25.0	25.0	50	250	7225050250
25.0	25.0	50	330	7225050330

- Lengths according to demand
- Shank relieve according to demand